


Autobahn Ceramic i3 Window Film is a premium product that offers the highest level of protection and performance. With its advanced multi-layer ceramic construction, this film provides exceptional heat rejection, UV protection, and glare reduction. Additionally, the thick deep dye construction means that it is incredibly durable and won't fade or discolor over time.



Product Characteristics

Product	VLT	Visible light reflectance	Shading Coefficient (SC)	Solar Absorption	Total Solar Energy Rejected	UV Rejection	IRR (1025 nm)	Glare Reduction	Adhesive Type	Thickness	Liner Orientation
Ceramic i3 Ø5	5%	6%	0.34	89%	71%	>99%	93%	95%	PSA	1.5 Mil	Out
Ceramic i3 15	15%	7%	0.35	87%	68%	>99%	93%	89%	PSA	1.5 Mil	Out
Ceramic i3 22	22%	7%	0.38	83%	66%	>99%	93%	79%	PSA	1.5 Mil	Out
Ceramic i3 33	33%	7%	0.46	73%	62%	>99%	93%	59%	PSA	1.5 Mil	Out
Ceramic i3 40	40%	8%	0.47	70%	60%	>99%	93%	50%	PSA	1.5 Mil	Out
Ceramic i3 56	56%	8%	0.55	65%	56%	>99%	93%	38%	PSA	1.5 Mil	Out
Ceramic i3 70	67%	7%	0.59	57%	50%	>99%	93%	27%	PSA	2.0 Mil	Out

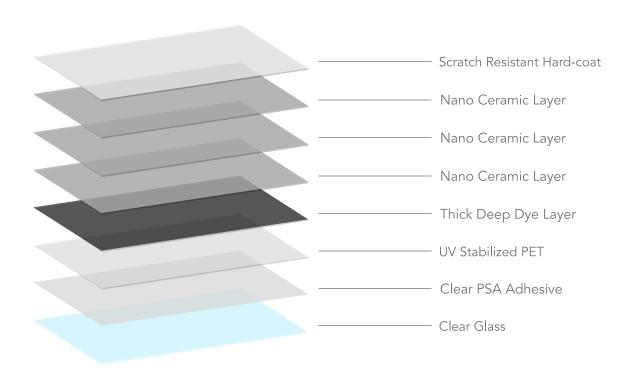